

EM50
FLUXMASTER

STM
AUSTRALIA

TECO

SELECT TRANSMISSION & MOTORS AUSTRALIA PTY LTD
GEAR REDUCER AND DRIVE SYSTEM SPECIALISTS



- **Micro AC Inverter**
- **Low Cost**
- **Space Saving Design**
- **UL / cUL / CE Approved**
- **EMI Filter Built-in**

PHONE: 03 9761 7355

FAX: 03 9761 7222

SELECT PRODUCTS

SELECT SERVICE

SELECT SOLUTIONS

Wormboxes, Electric motors, Shaft couplings, Sprockets, V-Belts, Pulleys, Gearmotors, Shaft Mounts, Conveyor Rollers




SELECT TRANSMISSION & MOTORS AUSTRALIA PTY LTD

GEAR REDUCER AND DRIVE SYSTEM SPECIALISTS

PRODUCT SPECIFICATION

Voltage		115V		230V				400V			
Model # FM50-□□□-XXXX		1P2	1P5	2P2	2P5	201	202	203	401	402	403
Output Characteristics	Max. Applicable Motor Output HP (KW)	0.25 (0.2)	0.5 (0.4)	0.25 (0.2)	0.5 (0.4)	1 (0.75)	2 (1.5)	3 (2.2)	1 (0.75)	2 (1.5)	3 (2.2)
	Inverter Capacity (KVA)	0.53	0.88	0.53	0.88	1.6	2.9	4	1.7	2.9	4
	Rated Output Current (A)	1.4	2.3	1.4	2.3	4.2	7.5	10.5	2.3	3.8	5.2
	Max. Output Voltage	3-Phase, 200-240V							3-Phase, 380-460V		
	Rated Output Frequency	Up To 120Hz Available									
Power Supply	Rated Input Voltage and Frequency	1-Phase 100-120V, 50/60Hz		1-Phase 200-240V, 50/60Hz			1/3-Phase 200-240V, 50/60Hz		3-Phase 380-460V, 50/60Hz		
	Voltage Fluctuation	+10%~-15%									
	Frequency Fluctuation	±5%									
Control Characteristics	Digital Operator	Setup by ▲▼ Buttons									
	Input Signal Type	PNP Type (Source) Input (External 24VDC Input is Allowed)									
	Carrier Frequency	Adjustable									
	Frequency Control Range	1-120Hz (Sine Wave PWM)									
	Frequency Setting Resolution	Digital Operator Reference: 0.1Hz (1-99.9Hz) ; 1Hz (100-120Hz) Analog Reference: 1Hz/60Hz									
	Frequency Setting Signal	0-10VDC, 4-20mA, 0-20mA									
	Accel / Decel Time	0.1-999 Seconds									
	Braking Torque	Approximately 20% (No additional braking allowed)									
	Number of V / F Patterns	6 Preset V / F Patterns									
Protective Functions	Instantaneous Overcurrent	Approximately 200% of Rated Output Current (based on standard 4 pole motor)									
	Overload Capacity	150% Rated Output Current for One Minute									
	Overvoltage (460V Series)	When inverter output voltage exceeds 800VDC									
	Overvoltage (115 and 230V Series)	When Inverter Output Voltage Exceeds 410VDC									
	Undervoltage (460V Series)	When Inverter Output Voltage Drops to 400VDC or Below									
	Undervoltage (115 and 230V Series)	When Inverter Output Voltage Drops to 200VDC or Below									
	Momentary Power Loss	0-2 Seconds (Inverter can be Restarted with Speed Search)									
	Fin Overheat	Thermostat									
	Stall Prevention	Stall Prevention at Acceleration / Deceleration and Constant Speed Operation									
	Ground Fault	Provided by Electronic Circuit									
Short Circuit	Provided by Electronic Circuit										
Environmental Conditions	Enclosure	IP20 / IP65 (NEMA 4)									
	Ambient Temperature	-10 to 50°C									
	Humidity	0-95% RH (Non-Condensing)									
	Vibration	Under 1G (9.8m / s ²)									
UL	UL508C										
CE	EN50081-1, EN50082-2, EN50178										
Installation	Mounting Screw or DIN rail (option)										

Model Designation :

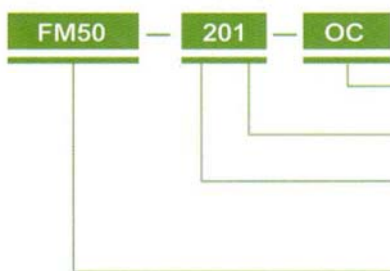

- Enclosure / Filter**
- C : IP20 Enclosure
- OC : IP20 Enclosure with Filter
- N4 : IP65 (NEMA4) Enclosure
- N4FS : IP65 (NEMA4) Enclosure with Filter
- Max. Applicable Motor Output (HP)**
- P5=0.5HP · 01=1HP
- Rated Voltage :**
- 1 : 115V
- 2 : 230V
- 4 : 400V
- FM50 Series**

PHONE: 03 9761 7355

FAX: 03 9761 7222

SELECT PRODUCTS

SELECT SERVICE

SELECT SOLUTIONS

Wormboxes, Electric motors, Shaft couplings, Sprockets, V-Belts, Pulleys, Gearmotors, Shaft Mounts, Conveyor Rollers